

PI-1000 Series Battery Information

Question:

I just bought the Argox PI-1030, what should I notice on the battery charging?

Model Applies to:

PI-1000 Series

Answer:

Inserting or replacing battery


When you see the battery icon shows low. You need to change new battery or charge it immediately. If there is no power, the back up battery can hold the data about 15 minutes. Therefore, always upload your important data after work or keep two AA batteries in case.




Caution Do not mix old batteries and new batteries or standard (carbon-zinc) with alkaline batteries. Remove batteries if product is not to be used with for a long time. Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

DO NOT RECHARGE DIFFERENT TYPES OF BATTERIES.


1. Press and slide two release latches at the same time to open the battery cover.

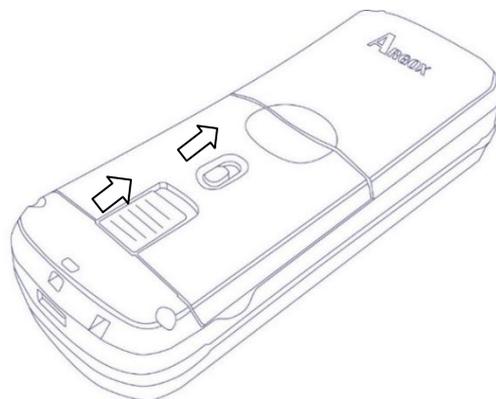

2. Inserting two batteries as indicated inside battery compartment.
3. Close the battery cover as follow.

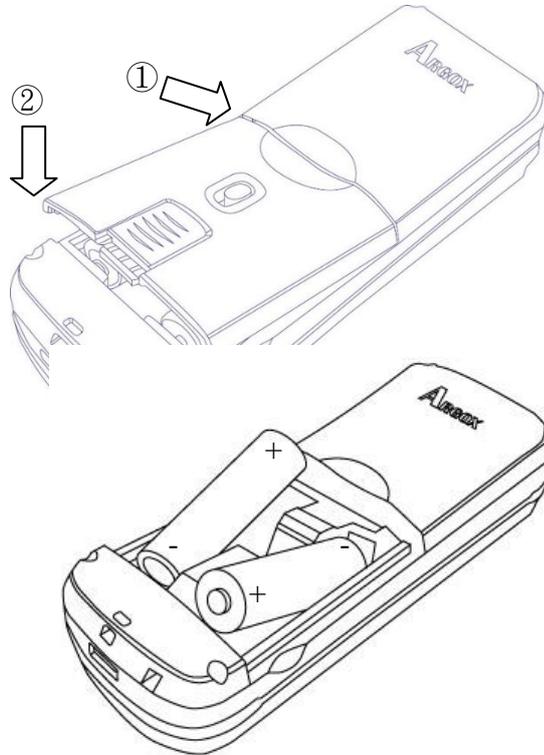

4. Make sure cover is closed and slide two latches back.

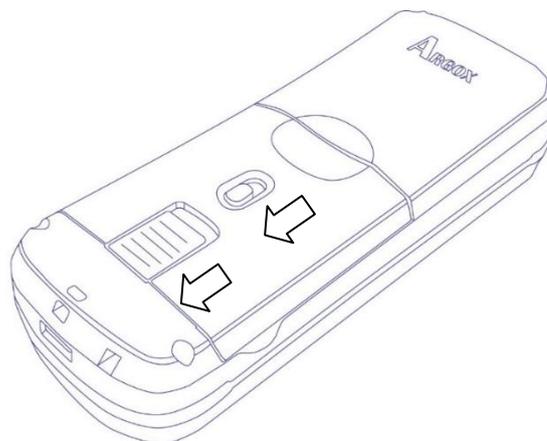

Charge the battery

If you're using rechargeable batteries to supply power to your terminal, you can charge them by

- (1) connecting the USB cable to your terminal and computer.
- (2) Using a battery charger to charge batteries in advance.
- (3) Connecting the USB cable to your terminal and use a power supply.

When your batteries are fully charged, the Charger LED turns to solid red.

Charging by	Full Charge Time
Power Supply	5-6 hours
USB Cable	7-8 hours



Important Before using PI series, we recommend to charge PI-1000 series 1 day to make sure backup battery is fully charged.



Important To protect power source, PI series can not be powered on unless battery cover back are closed correctly.





Note The triangle mark should be face up when you want to connect to PI series.

